



AUX. SWITCH BLOCK, 1 NO+1 NC,
DIN EN50012, LATERALLY,
10 MM SCREW CONNECTION,
SIZE S3...S12 FOR MOTOR CONTACTORS,
2-POLE

Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		
• instantaneous switching		1
Number of NO contacts / for auxiliary contacts		
• instantaneous switching		1
Operating current / of the auxiliary contacts / at AC-15		
• at 230 V	A	6
Installation/mounting/dimensions:		
Type of mounting		snap-on mounting
Connections:		
Design of the electrical connection		
• for auxiliary and control current circuit		screw-type terminals
Certificates/approvals:		

General Product Approval				Functional Safety / Safety of Machinery	Declaration of Conformity
--------------------------	--	--	--	---	------------------------------



CCC



CSA



GOST



UL

[Type Examination](#)



EG-Konf.

Test Certificates	Shipping Approval	other
-------------------	-------------------	-------

[Special Test
Certificate](#)



ABS



GL



RMRS

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH1921-1JA11/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1921-1JA11

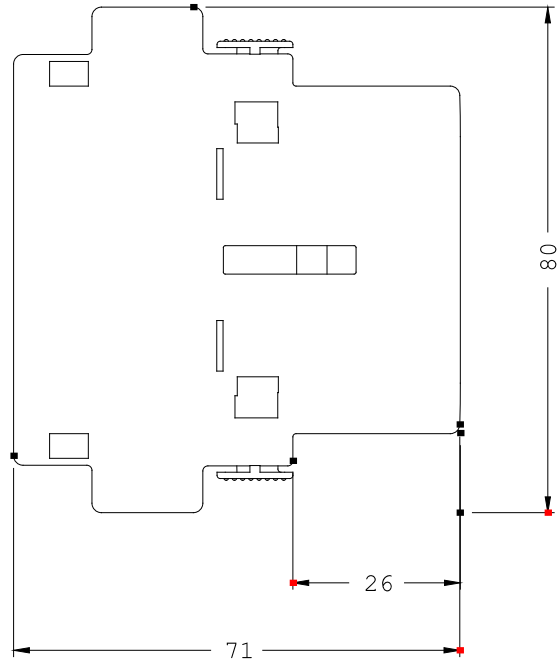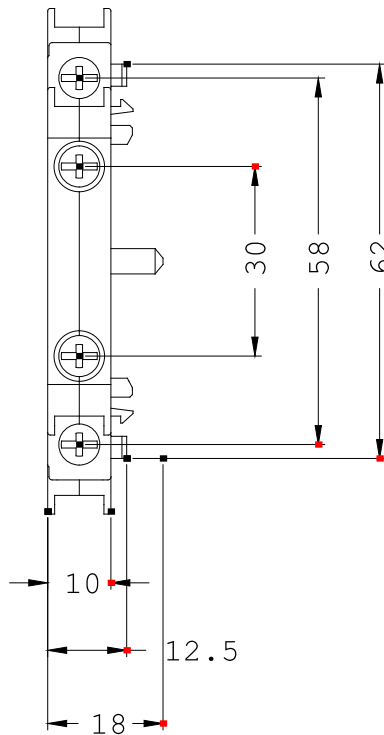

last change:

Sep 10, 2012