
SIEMENS

Product data sheet 3RT1926-3AB31



MECHANICAL LATCHING BLOCK FOR MOUNTING ON 3RT1.2. AND 3RT1.3., 24 V AC/DC

product brand name			
	mechanical latch		
	S0, S2		
	IP20		
V	690		
°C	-50 +80		
°C	-25 +60		
	0		
	0		
	AC/DC		
	°C		

Type of mounting	clip-on
mounting position	any

Connections:							
Design of the electrical connection							
 for auxiliary and control current circuit 	screw-type terminals						
Type of the connectable conductor cross-section							
for auxiliary contacts							
• solid	2x (0.5 2.5 mm²), 1x 4 mm²						
• finely stranded							
 with conductor end processing 	2x (0.5 2.5 mm²), 1x 2.5 mm²						
• for AWG conductors / for auxiliary contacts	2x 14, 1x 12						

 for AWG conductors / for auxiliary contacts 		2x 14, 1x 12				
Certificates/app	rovals:					
Verification of suitability		CE/UL/CSA/CCC				
General Product Approval		Functional Safety / Safety of Machinery		Declaration of Conformity	Test Certificates	
S	P □ GOST	UL UL	Type Examination EG-Konf.		EG-Konf.	Special Test Certificate
Shipping Approv	/al					















Shipping Approval





other

Confirmation

Declaration of Conformity

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

CAx-Online-Generator


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{http://support.automation.siemens.com/WW/view/en/3RT1926-3AB31/all}}$

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT19}26\text{-}3AB31}$

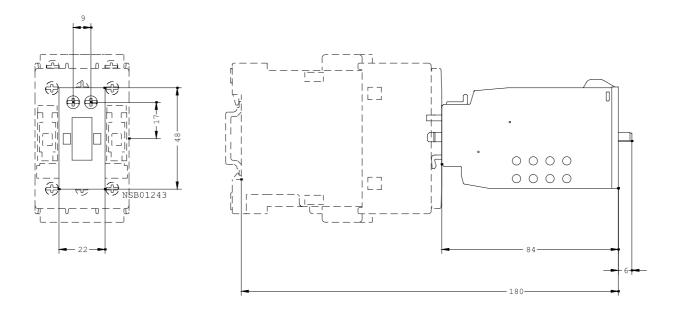

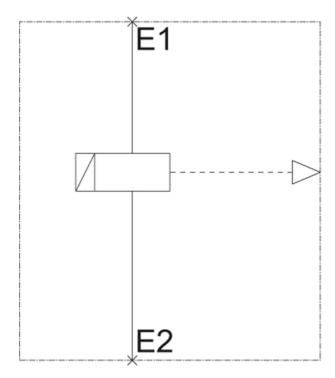

last change: Sep 26, 2012